

MOX Systems - tehnička dokumentacija

datasheet-wishled-en.pdf

Tehnički prijevod: konsultujte originalne crteže i referentne stranice za dimenzije.

Izvorna stranica 1

Tehnički list proizvoda

Proizvođač Mox Profile Systems

Naslov dokumenta Dizajn i kvaliteta: Wishled

Naziv proizvoda Wishled

Opis proizvoda Aluminijska LED lajsna s uzorkom

Stavka br. WSL

Područje upotrebe Javno, Uredsko, Stambeno

Materijal EN AW 6463 T6, EN AW 6061 T6

Dužina 2500mm

Površinski obložen prahom, eloksiran, hromiran

WishLED aluminijska LED lajsna može se uklopiti u bilo koje okruženje zahvaljujući neograničenim mogućnostima dizajna uzoraka.

Najviše se preferira kao noćna rasvjeta u dječjim sobama sa zamjenjivim dizajnom odštampanim poklopcem.

Može se koristiti i za oglašavanje i predstavljanje korporativnog identiteta na javnim površinama.

Osim svoje funkcije osvjetljenja, pokriva i nedostatke na podnim i zidnim spojevima.

Sprječava nakupljanje prljavštine i štetnih organizama kako bi se osigurala higijenska i zdrava upotreba dugi niz godina.

Sa šupljim područjem u svom dizajnu, prikuplja telefonske, strujne i internetske kablove kako bi organizirao vaše okruženje.

Izuzetno je izdržljiv i dugotrajan jer je proizveden od visokokvalitetnih sirovina i ima debele stijenke.

Za razliku od svojih konkurenata, ističe se debljinom premaza i kvalitetom eloksiranja, te primjenom predtretmana koja osigurava otpornost na koroziju kod elektrostatičkog praškastog farbanja.

Gornji i donji okvir WishLED-a su aluminijski i u sredini imaju dizajn štampanu ploču koja se može zameniti po ukusu.

WishLED aluminijska LED lajsna može se jednostavno postaviti tako što se profil karoserije pričvrsti na zid vijcima i ugradi LED trake i drajver unutra.

Aplikacija će biti završena montažom prednjeg dizajna štampane ploče difuzora sa sistemom za zaključavanje.

Sa unutrašnjim, vanjskim i završnim poklopcima, koji su iste boje kao i profili, glatki uglovi se mogu lako primijeniti bez potrebe za uglom rezu.

Ugaone kape takođe sprečavaju nedostatke u osvetljenju.

WishLED aluminijska LED lajsna ima mat anodizirane, svijetle anodizirane, satenske kemijske svijetle anodizirane i elektrostatičke boje u prahu.

Dok su dostupni srebrni, žuti, inox, bronzani i crni eloksirani premazi u boji, može se farbati i prema željenom RAL kodu elektrostatičkim praškastim farbanjem.

Pored postojećih dezena koje nudimo za panel iluminatora, mogu se primeniti i personalizovani dizajni.

Stranica 1/3

Garancija

Ovaj proizvod je pod garancijom 5 godina od datuma prijema osim za greške korisnika kao što su navedene u nastavku:

Oštećenja uzrokovana udarom Oštećenja uzrokovana grebanjem Oštećenja uzrokovana kontaktom abrazivnih tvari ili kemijskih sredstava za čišćenje Oštećenja uzrokovana produženim kontaktom s vodom Oštećenja uzrokovana izlaganjem visokoj temperaturi Oštećenja uzrokovana montažom

LANOITANRETNİ FORANODİZACIJSKA OZNAKA KVALİTETA İNDÜSTRİJSKA TS-EN 755-8 TS-EN 755-9 TS 4922

Izvorna stranica 2

ALLOY DATASHEET

EN AW 6463 T6 [AlMg0.7Si]

Mjesto upotrebe

Legura EN AW-6463 je široko rasprostranjena legura za ekstruziju, pogodna za primjene gdje su potrebna samo skromna svojstva čvrstoće.

Dijelovi mogu biti

proizveden s dobrim kvalitetom površine, pogodan za mnoge operacije premazivanja.

Tipična područja primjene su namještaj, završni materijali, prozori i vrata,

dorada karoserije automobila, izrada fasada, rasvjetni stubovi i jarboli.

Hemijski sastav prema EN573-3 (težina%, ostatak Al)

Si Fe Cu Mn Mg Cr Zn Ti Al

0,20 - 0,60 Max 0,15 0,2 Max 0,5 0,45 - 0,9 - Max 0,05 Max 0,1 Ostalo

Mehanička svojstva prema EN755-2

Temperatura* Debljina stijenke e*** Napon tečenja Vlačna čvrstoća Izduženje Tvrdća po Brinellu

- e* mm Rp0,2 min Mpa Rm min Mpa Min A50mm % - Max A % HB**

T4 e≤50 75 125 14 - 12 46

T5 e≤50 150 110 8 - 6 60

T6 e≤50 195 160 10 - 8 74

* Oznaka temperamena prema EN515: T4-prirodno ostario u stabilno stanje, T5-ohlađen od operacije oblikovanja na povišenoj temperaturi i

umjetno odležano, T6-Solution termički obrađeno, kaljeno i umjetno odležano,

** Vrijednosti tvrdoće su samo indikativne,

*** Za različite debljine zida unutar jednog profila, najniža specificirana svojstva će se smatrati važećim za cijeli poprečni presjek profila.

Fizička svojstva (približne vrijednosti, 20°C)

Gustina Opseg topljenja Električni toplinski koeficijent modula od

(kg/m³) (°C) provodljivost provodljivost toplotna elastičnost

2700 585-650 (MS/m) (W/m.K) ekspanzija (GPa)

28-34 200-220 10⁻⁶/K ~70

Zavarljivost¹

Gas: 3 TIG: 2 MIG: 2

Tipični materijali za punjenje (EN ISO18273): SG-AlMg5Cr(A) ili AlSi5 i AlMg3 kada se proizvod mora anodizirati.

Zbog unosa topline tokom zavarivanja

mehanička svojstva će se smanjiti za približno 50% (ref.

EN1999-1).

Karakteristike obrade¹: T4 Temper 3 / T5, T6 Temper 2

Svojstva premaza¹ Tvrd/zaštitno eloksiranje: 1 / Dekorativno / svijetlo / eloksiranje u boji: 2

Otpornost na koroziju¹ Općenito: 1 Pomorski: 2

¹Relativna kvalifikacija u rasponu od 1-veoma dobro do 6-neprikladno

Strana 2/3

Izvorna stranica 3

Pvc prozirna led difuzorska traka

Merna traka, bez ugla Merna traka, br

Tolerancije pile Tolerancije pile (umetni rez)

test ugaonog testa

DIN 16941:2021-11 Tolerancija kružnog prečnika i visine ivice (mm) DIN 16941:2021-11 4 Tolerancija izobličenja TV

Tolerancija serije 3 3-6 6-10 10-18 30-50 50-80 >50 Tolerancija Line <30 30-60 60-120 120-180 180-250 >250

2A & 2B $\pm 0,5$ $\pm 20\%$ $\pm 18\%$ $\pm 15\%$ $\pm 15\%$ $\pm 12\%$ $\pm 10\%$ 2A, 3A, 4A 5° 4° 3°30' 3° 2°30' 2°

DIN 16941:2021-11 Raspon nominalnih veličina (mm)

Tolerancija debljine zida Tolerancije mjerenja dužine

Tolerance Series

2A & 2B $\pm 0,2$ $\pm 0,3$ $\pm 0,4$ $\pm 0,5$ $\pm 0,6$ $\pm 0,8\%$ $\pm 0,3$ $\pm 0,4$ $\pm 0,5$ $\pm 0,6$ $\pm 0,7$ $\pm 0,8$ $\pm 1,0$ $\pm 1,2$ $\pm 2,0$ $\pm 3,0$

Strana 3/3


Originalni crteži i referentne stranice

Product Datasheet



Manufacturer	Mox Profile Systems
Document Title	Design and quality: Wishled
Product Name	Wishled
Product Description	Patterned Aluminium LED Skirting Board
Item No	WSL
Area of Use	Public, Office, Residential
Material	EN AW 6463 T6, EN AW 6061 T6
Length	2500mm
Surface	Powder Coated, Anodised, Chrome Plated

WishLED aluminium LED skirting board can match with any environment due to its unlimited pattern designs options. It is mostly preferred as night lighting in children's rooms with its replaceable design printed cover. It can also be used for advertising and to present corporate identity in public areas. In addition to its illumination feature, it also covers the defects in floor and wall joints. It prevents dirt accumulation and harmful organisms to provide hygienic and healthy use for many years. With the hollow area in its design, it collects the telephone, electricity and internet cables to organize your environment. It is extremely durable and long-lasting since it is produced from high quality raw material and has thick walls. Unlike its competitors, it stands out with its coating thickness and quality of anodizing, and with its pretreatment application that provides resistance to corrosion in electrostatic powder painting. WishLED's upper and lower frames are aluminium and has design printed panel in the middle that can be replaced according to taste. WishLED aluminium LED skirting board can be easily installed by fixing the body profile to wall with screws and installing the LED strips and driver inside. Application will be completed by mounting the front design printed diffuser panel with its snap lock system. With the inner, outer and end covering caps, which are the same color as the profiles, smooth corner turns can be easily applied without the need for an angled cut. Corner caps also prevent lighting flaws. WishLED patterned aluminium LED skirting board has matte anodized, bright anodized, satin chemical bright anodized and electrostatic powder painting options. While silver, yellow, inox, bronze and black anodized color coatings are available, it can also be painted to the desired RAL code with electrostatic powder painting. In addition to existing pattern designs we offer for the illuminator panel, personalized designs can also be applied.

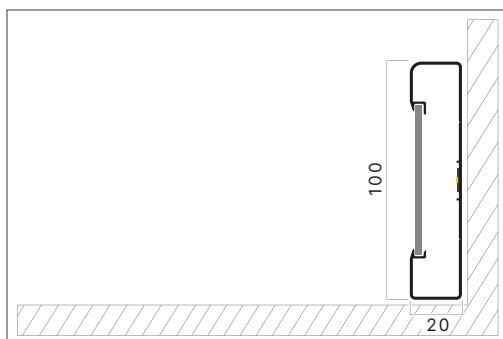

Warranty

This product is under warranty for 5 years from the date of receipt except for the user errors as listed below:

- Damage caused by impact
- Damage caused by scratching
- Damage caused by abrasive substance or chemical cleaning agents contact
- Damage caused by prolonged contact with water
- Damage caused by exposure to intense temperature
- Damage caused by montage



ALLOY DATASHEET

EN AW 6463 T6 [AlMg0.7Si]

Place Of Use

The alloy EN AW-6463 is a widely used extrusion alloy, suitable for applications where only modest strength properties are required. Parts can be produced with a good surface quality, suitable for many coating operations. Typical application fields are furniture, finishing materials, windows and doors, car body finishing, facade construction, lighting columns and flagpoles.

Chemical composition according to EN573-3 (weight%, remainder Al)

Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Al
0,20 - 0,60	Max 0,15	0,2	Max 0,5	0,45 - 0,9	-	Max 0,05	Max 0,1	Rest

Mechanical properties according to EN755-2

Temper*	Wall Thickness e***	Yield Stress	Tensile Strength	Elongation	Brinell Hardness
-	e* mm	Rp0,2 min Mpa	Rm min Mpa	Min A50mm % - Max A %	HB**
T4	e≤50	75	125	14 - 12	46
T5	e≤50	150	110	8 - 6	60
T6	e≤50	195	160	10 - 8	74

* Temper designation according to EN515: T4-Naturally aged to a stable condition, T5-cooled from an elevated temperature forming operation and artificially aged, T6-Solution heat treated, quenched and artificially aged,

** Hardness values are for indication only,

*** For different wall thicknesses within one profile, the lowest specified properties shall be considered as valid for the whole profile cross section.

Physical properties (approximate values, 20°C)

Density (kg/m³)	Melting range (°C)	Electrical conductivity (MS/m)	Thermal conductivity (W/m.K)	Co-efficient of thermal expansion 10 ⁻⁶ /K	Modulus of elasticity (GPa)
2700	585-650	28-34	200-220	23.4	~70

Weldability¹

Gas: 3 TIG: 2 MIG: 2

Typical filler materials (EN ISO18273): SG-AlMg5Cr(A) or AlSi5, and AlMg3 when the product has to be anodised. Due to the heat input during welding the mechanical properties will be reduced by approximately 50% (ref. EN1999-1).

Machining characteristics¹: T4 Temper 3 / T5, T6 Temper 2

Coating properties¹ Hard/protective anodising: 1 / Decorative / bright / colour anodising: 2

Corrosion resistance¹ General: 1 Marine: 2

¹Relative qualification ranging from 1-very good to 6-unsuitable

Pvc Transparent Led Diffuser Strip

Saw Tolerances							Measuring tape, no angle test	Saw Tolerances (Inline Cut)							Measuring tape, no angle test
<500	>500	>1000	>1500	>2000	>3000	>4000	>4500	<500	>500	>1000	>1500	>2000	>3000	>4000	>4500
±0.3	±0.5	±1.0	±1.5	±2.0	±3.0	±4.0	±0.1%	±0.3	±0.5	±1.0	±1.5	±2.0	±3.0	±4.0	±0.1%

DIN 16941:2021-11	Tolerance of the circular diameter and chamfer heights (mm)							DIN 16941:2021-11	4 Distortion tolerance TV					
Tolerance Series	3	3-6	6-10	10-18	30-50	50-80	>50	Tolerance Line	<30	30-60	60-120	120-180	180-250	>250
2A & 2B	±0.5	±20%	±18%	±15%	±15%	±12%	±10%	2A, 3A, 4A	5°	4°	3°30'	3°	2°30'	2°

DIN 16941:2021-11	Nominal Size Range (mm)															
Tolerance Series	Tolerance of wall thickness						Tolerances of length measurements									
	1.2	1.2-2.5	2.5-4	4-6.5	6.5-10	>10	<3	3-6	6-10	10-18	18-30	30-50	50-80	80-120	120-250	250-400
2A & 2B	±0.2	±0.3	±0.4	±0.5	±0.6	±0.8%	±0.3	±0.4	±0.5	±0.6	±0.7	±0.8	±1.0	±1.2	±2.0	±3.0

