

MOX sustavi - tehnička dokumentacija

datasheet-wishled-en.pdf

Tehnički prijevod: pogledajte izvorne crteže i referentne stranice za dimenzije.

Izvorna stranica 1

Tehnička tablica proizvoda

Proizvođač Mox Profile Systems

Naziv dokumenta Dizajn i kvaliteta: Wishled

Naziv proizvoda Wishled

Opis proizvoda Aluminijska LED letvica s uzorkom

Stavka br. WSL

Područje korištenja Javno, uredsko, stambeno

Materijal EN AW 6463 T6, EN AW 6061 T6

Duljina 2500mm

Površina premazana prahom, anodizirana, kromirana

WishLED aluminijska LED lajsna može se uklopiti u bilo koje okruženje zahvaljujući neograničenim mogućnostima dizajna uzoraka.

Uglavnom se preferira kao noćna rasvjeta u dječjim sobama sa svojom zamjenjivom dizajnerskom tiskanom maskom.

Također se može koristiti za oglašavanje i predstavljanje korporativnog identiteta na javnim mjestima.

Uz svojstvo osvijetljavanja, pokriva i nedostatke na podnim i zidnim spojevima.

Sprječava nakupljanje prljavštine i štetnih organizama kako bi se omogućilo higijensko i zdravo korištenje dugi niz godina.

Sa šupljim područjem u svom dizajnu, skuplja telefonske, električne i internetske kabele za organiziranje vašeg okruženja.

Izuzetno je izdržljiv i dugotrajan jer je proizveden od visokokvalitetnih sirovina i ima debele stijenke.

Za razliku od svojih konkurenata, ističe se debljinom premaza i kvalitetom eloksiranja, te primjenom predtretmana koji osigurava otpornost na koroziju kod elektrostatskog bojanja prahom.

Gornji i donji okviri WishLED-a su aluminijski i imaju dizajn tiskanu ploču u sredini koja se može zamijeniti prema ukusu.

WishLED aluminijska LED lajsna može se jednostavno postaviti pričvršćivanjem profila kućišta na zid vijcima i ugradnjom LED traka i pokretača unutra.

Primjena će biti dovršena montažom ploče difuzora s prednjim dizajnom i njezinim sustavom zaključavanja.

S unutarnjim, vanjskim i krajnjim pokrovnim kapama, koje su iste boje kao i profili, lako se mogu postaviti glatki zavoji kutova bez potrebe za kutnim rezom.

Kutne kapice također sprječavaju nedostatke osvijetljenja.

WishLED aluminijska LED lajsna s uzorkom ima opcije mat eloksiranog, svijetlo eloksiranog, satensko kemijski svijetlo eloksiranog i elektrostatičkog bojanja u prahu.

Iako su dostupni srebrni, žuti, inox, brončani i crni anodizirani premazi u boji, također se može bojati u željenu RAL šifru elektrostatskim bojanjem u prahu.

Uz postojeće dizajne uzoraka koje nudimo za ploču iluminatora, mogu se primijeniti i personalizirani dizajni.

Stranica 1/3

Jamstvo

Ovaj proizvod je pod jamstvom 5 godina od datuma primitka osim za greške korisnika kao što je navedeno u nastavku:

Oštećenje uzrokovano udarcem Oštećenje uzrokovano grebanjem Oštećenje uzrokovano dodiranjem abrazivnih tvari ili kemijskih sredstava za čišćenje Oštećenje uzrokovano produljenim kontaktom s vodom Oštećenje uzrokovano izlaganjem visokoj temperaturi Oštećenje uzrokovano montažom

LANOITANRETNİ FORANODİSİNG QUALİTYLABEL İNDUSTRIAL TS-EN 755-8 TS-EN 755-9 TS 4922

Izvorna stranica 2

TABLICA PODATAKA O LEGINI

EN AW 6463 T6 [AlMg0.7Si]

Mjesto upotrebe

Legura EN AW-6463 široko je korištena legura za ekstruziju, pogodna za primjene gdje su potrebna samo skromna svojstva čvrstoće.

Dijelovi mogu biti

proizveden s dobrom kvalitetom površine, pogodan za mnoge postupke premazivanja.

Tipična područja primjene su namještaj, završni materijali, prozori i vrata,

dorada karoserije, izrada fasade, stupovi rasvjete i zastave.

Kemijski sastav prema EN573-3 (težina%, ostatak Al)

Si Fe Cu Mn Mg Cr Zn Ti Al

0,20 - 0,60 Max 0,15 0,2 Max 0,5 0,45 - 0,9 - Max 0,05 Max 0,1 Ostatak

Mehanička svojstva prema EN755-2

Temperatura* Debljina stijenke e*** Napon tečenja Vlačna čvrstoća Istezanje Tvrdća po Brinellu

- e* mm Rp0,2 min Mpa Rm min Mpa Min A50mm % - Max A % HB**

T4 e≤50 75 125 14 - 12 46

T5 e≤50 150 110 8 - 6 60

T6 e≤50 195 160 10 - 8 74

* Oznaka temperiranja prema EN515: T4-prirodno odležao do stabilnog stanja, T5-ohlađen nakon operacije oblikovanja na povišenoj temperaturi i

umjetno odležano, T6-Solution toplinski obrađeno, kaljeno i umjetno odležano,

** Vrijednosti tvrdoće samo su indikativne,

*** Za različite debljine stijenke unutar jednog profila, najniža specificirana svojstva se smatraju važećim za cijeli presjek profila.

Fizička svojstva (približne vrijednosti, 20°C)

Gustoća Raspon taljenja Električni toplinski koeficijent modula

(kg/m³) (°C) vodljivost vodljivost toplinska elastičnost

2700 585-650 (MS/m) (W/m.K) ekspanzija (GPa)

28-34 200-220 10⁻⁶/K ~70

Zavarljivost¹

Plin: 3 TIG: 2 MIG: 2

Tipični materijali za punjenje (EN ISO18273): SG-AlMg5Cr(A) ili AlSi5, i AlMg3 kada se proizvod mora anodizirati.

Zbog unosa topline tijekom zavarivanja

mehanička svojstva bit će smanjena za približno 50% (ref.

EN1999-1).

Karakteristike obrade¹: T4 Temper 3 / T5, T6 Temper 2

Svojstva premaza¹ Tvrd/zaštitno eloksiranje: 1 / Dekorativno / svijetlo / eloksiranje u boji: 2

Otpornost na koroziju¹ Općenito: 1 Pomorstvo: 2

¹Relativna kvalifikacija u rasponu od 1-vrlo dobar do 6-neprikladan

Stranica 2/3

Izvorna stranica 3

Pvc prozirna Led traka difuzora

Mjerna traka, bez kuta Mjerna traka, br

Tolerancije pile Tolerancije pile (linijski rez)

ispitni kut test

DIN 16941:2021-11 Tolerancija kružnog promjera i visine skošenja (mm) DIN 16941:2021-11 4 Tolerancija izobličenja TV

Serijske tolerancije 3 3-6 6-10 10-18 30-50 50-80 >50 Tolerancija Line <30 30-60 60-120 120-180 180-250 >250

2A & 2B $\pm 0,5$ $\pm 20\%$ $\pm 18\%$ $\pm 15\%$ $\pm 15\%$ $\pm 12\%$ $\pm 10\%$ 2A, 3A, 4A 5° 4° $3^\circ 30'$ 3° $2^\circ 30'$ 2°

DIN 16941:2021-11 Nominalni raspon veličina (mm)

Tolerancija debljine stijenke Tolerancija duljinskih mjera

Serijske Tolerancije

2A i 2B $\pm 0,2$ $\pm 0,3$ $\pm 0,4$ $\pm 0,5$ $\pm 0,6$ $\pm 0,8\%$ $\pm 0,3$ $\pm 0,4$ $\pm 0,5$ $\pm 0,6$ $\pm 0,7$ $\pm 0,8$ $\pm 1,0$ $\pm 1,2$ $\pm 2,0$ $\pm 3,0$

Stranica 3/3


Izvorni crteži i referentne stranice

Product Datasheet



Manufacturer	Mox Profile Systems
Document Title	Design and quality: Wishled
Product Name	Wishled
Product Description	Patterned Aluminium LED Skirting Board
Item No	WSL
Area of Use	Public, Office, Residential
Material	EN AW 6463 T6, EN AW 6061 T6
Length	2500mm
Surface	Powder Coated, Anodised, Chrome Plated

WishLED aluminium LED skirting board can match with any environment due to its unlimited pattern designs options. It is mostly preferred as night lighting in children's rooms with its replaceable design printed cover. It can also be used for advertising and to present corporate identity in public areas. In addition to its illumination feature, it also covers the defects in floor and wall joints. It prevents dirt accumulation and harmful organisms to provide hygienic and healthy use for many years. With the hollow area in its design, it collects the telephone, electricity and internet cables to organize your environment. It is extremely durable and long-lasting since it is produced from high quality raw material and has thick walls. Unlike its competitors, it stands out with its coating thickness and quality of anodizing, and with its pretreatment application that provides resistance to corrosion in electrostatic powder painting. WishLED's upper and lower frames are aluminium and has design printed panel in the middle that can be replaced according to taste. WishLED aluminium LED skirting board can be easily installed by fixing the body profile to wall with screws and installing the LED strips and driver inside. Application will be completed by mounting the front design printed diffuser panel with its snap lock system. With the inner, outer and end covering caps, which are the same color as the profiles, smooth corner turns can be easily applied without the need for an angled cut. Corner caps also prevent lighting flaws. WishLED patterned aluminium LED skirting board has matte anodized, bright anodized, satin chemical bright anodized and electrostatic powder painting options. While silver, yellow, inox, bronze and black anodized color coatings are available, it can also be painted to the desired RAL code with electrostatic powder painting. In addition to existing pattern designs we offer for the illuminator panel, personalized designs can also be applied.

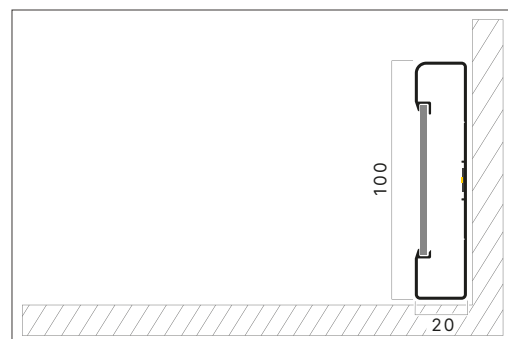

Warranty

This product is under warranty for 5 years from the date of receipt except for the user errors as listed below:

- Damage caused by impact
- Damage caused by scratching
- Damage caused by abrasive substance or chemical cleaning agents contact
- Damage caused by prolonged contact with water
- Damage caused by exposure to intense temperature
- Damage caused by montage



ALLOY DATASHEET

EN AW 6463 T6 [AlMg0.7Si]

Place Of Use

The alloy EN AW-6463 is a widely used extrusion alloy, suitable for applications where only modest strength properties are required. Parts can be produced with a good surface quality, suitable for many coating operations. Typical application fields are furniture, finishing materials, windows and doors, car body finishing, facade construction, lighting columns and flagpoles.

Chemical composition according to EN573-3 (weight%, remainder Al)

Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Al
0,20 - 0,60	Max 0,15	0,2	Max 0,5	0,45 - 0,9	-	Max 0,05	Max 0,1	Rest

Mechanical properties according to EN755-2

Temper*	Wall Thickness e***	Yield Stress	Tensile Strength	Elongation	Brinell Hardness
-	e* mm	Rp0,2 min Mpa	Rm min Mpa	Min A50mm % - Max A %	HB**
T4	e≤50	75	125	14 - 12	46
T5	e≤50	150	110	8 - 6	60
T6	e≤50	195	160	10 - 8	74

* Temper designation according to EN515: T4-Naturally aged to a stable condition, T5-cooled from an elevated temperature forming operation and artificially aged, T6-Solution heat treated, quenched and artificially aged,

** Hardness values are for indication only,

*** For different wall thicknesses within one profile, the lowest specified properties shall be considered as valid for the whole profile cross section.

Physical properties (approximate values, 20°C)

Density (kg/m³)	Melting range (°C)	Electrical conductivity (MS/m)	Thermal conductivity (W/m.K)	Co-efficient of thermal expansion 10 ⁻⁶ /K	Modulus of elasticity (GPa)
2700	585-650	28-34	200-220	23.4	~70

Weldability¹

Gas: 3 TIG: 2 MIG: 2

Typical filler materials (EN ISO18273): SG-AlMg5Cr(A) or AlSi5, and AlMg3 when the product has to be anodised. Due to the heat input during welding the mechanical properties will be reduced by approximately 50% (ref. EN1999-1).

Machining characteristics¹: T4 Temper 3 / T5, T6 Temper 2

Coating properties¹ Hard/protective anodising: 1 / Decorative / bright / colour anodising: 2

Corrosion resistance¹ General: 1 Marine: 2

¹Relative qualification ranging from 1-very good to 6-unsuitable

Pvc Transparent Led Diffuser Strip

Saw Tolerances							Measuring tape, no angle test	Saw Tolerances (Inline Cut)							Measuring tape, no angle test
<500	>500	>1000	>1500	>2000	>3000	>4000	>4500	<500	>500	>1000	>1500	>2000	>3000	>4000	>4500
±0.3	±0.5	±1.0	±1.5	±2.0	±3.0	±4.0	±0.1%	±0.3	±0.5	±1.0	±1.5	±2.0	±3.0	±4.0	±0.1%

DIN 16941:2021-11	Tolerance of the circular diameter and chamfer heights (mm)							DIN 16941:2021-11	4 Distortion tolerance TV					
Tolerance Series	3	3-6	6-10	10-18	30-50	50-80	>50	Tolerance Line	<30	30-60	60-120	120-180	180-250	>250
2A & 2B	±0.5	±20%	±18%	±15%	±15%	±12%	±10%	2A, 3A, 4A	5°	4°	3°30'	3°	2°30'	2°

DIN 16941:2021-11	Nominal Size Range (mm)															
Tolerance Series	Tolerance of wall thickness						Tolerances of length measurements									
	1.2	1.2-2.5	2.5-4	4-6.5	6.5-10	>10	<3	3-6	6-10	10-18	18-30	30-50	50-80	80-120	120-250	250-400
2A & 2B	±0.2	±0.3	±0.4	±0.5	±0.6	±0.8%	±0.3	±0.4	±0.5	±0.6	±0.7	±0.8	±1.0	±1.2	±2.0	±3.0

