

MOX Systems - tækniskjöl

datasheet-line-en.pdf

Tæknileg þýðing: skoðaðu upprunalegu teikningarnar og tilvísunarsíður fyrir mál.

Heimildasíða 1

Vörugagnablað

Framleiðandi Mox Profile Systems

Heiti skjals Hönnun og gæði: Line

Vöruheiti Line

Vörulýsing Ál gólfefni Edge Profile

Vörunr LNE

Notkunarsvæði Almennur, skrifstofa, íbúðarhúsnæði

Efni EN AW 6463 T6, EN AW 6061 T6

Lengd 2500mm

Yfirborð anodized

Line álgólfkantarsnið er frábær kostur fyrir ýmis verkefni með fjölhæfri, endingargóðri og létttri uppbyggingu sem lokar bilinu á milli gólfefna.

Line álgólfskantsnið er hannað til að loka bilinu milli gólfflísa í sömu hæð.

Það er einstaklega endingargott og endingargott þar sem það er framleitt úr hágæða hráefni og hefur þykka vegg.

Ólíkt keppinautum sínum sker hann sig úr með þykkt lagsins og gæðum anodizing.

Line lokar fullkomlega bilinu á milli hæða með sínu flata formi.

Line álgólfskantsnið er auðvelt að festa með því að þrýsta ofan frá eftir að sílikon eða samskeyti er borið á bilið á milli tveggja hæða.

Hægt er að setja saman horn með því að klippa snið í 45 gráður.

Line álgólfskantsnið er með bjartri anodized húðun í silfurlitum og gulum litum.

Síða 1/2

Ábyrgð

Þessi vara er í ábyrgð í 5 ár frá móttökudegi nema fyrir notendavillur eins og taldar eru upp hér að neðan:

Skemmdir af völdum höggs Skemmdir af völdum klóra. Skemmdir af völdum slípiefna eða efnahreinsiefna í snertingu við snertingu við efnahreinsiefni. Skemmdir af völdum langvarandi snertingar við vatn. Skemmdir af völdum mikils hitastigs. Skemmdir af völdum uppsetningar

LANOITANRETNÍ FORANODISING QUALITYLABEL INDUSTRIAL TS-EN 755-8 TS-EN 755-9 TS 4922

Heimildasíða 2

ALLOY gagnablað

EN AW 6463 T6 [AlMg0.7Si]

Notkunarstaður

Málblönduna EN AW-6463 er mikið notað útpressunarál felgur, hentugur fyrir notkun þar sem aðeins er krafist lítils styrkleika.

Hlutar geta verið

framleitt með góðum yfirborðsgæðum, hentugur fyrir margar húðunaraðgerðir.

Dæmigert notkunarsvið eru húsgögn, frágangsefni, gluggar og hurðir, frágangur á yfirbyggingu bíla, framhliðargerð, ljósasúlur og fánastöng.

Efnasamsetning samkvæmt EN573-3 (þyngd%, afgangur Al)

Si Fe Cu Mn Mg Cr Zn Ti Al

0,20 - 0,60 Max 0,15 0,2 Max 0,5 0,45 - 0,9 - Max 0,05 Max 0,1 Rest

Vélrænir eiginleikar samkvæmt EN755-2

Temper* Veggþykkt e*** Afkastaspenna Togstyrkur Lenging Brinell hörku

- e* mm Rp0,2 mín Mpa Rm mín Mpa Min A50mm % - Hámark A % HB**

T4 e≤50 75 125 14 - 12 46

T5 e≤50 150 110 8 - 6 60

T6 e≤50 195 160 10 - 8 74

* Herðaheiti í samræmi við EN515: T4-Náttúrulega eldað í stöðugt ástand, T5-kælt frá háhitamyndun og tilbúnað öldrun, T6-lausun hitameðhöndluð, slökkt og tilbúinn öldrun,

** Hörkugildin eru aðeins til vísbendinga,

*** Fyrir mismunandi veggþykkt innan eins sniðs skulu lægstu tilgreindir eiginleikar taldir gilda fyrir allt sniðið.

Eðliseiginleikar (áætluð gildi, 20°C)

Eðlismassi Bræðslusvið Rafmagns hitastuðull af stuðull af

(kg/m³) (°C) leiðni leiðni hitateygjanleiki

2700 585-650 (MS/m) (W/m.K) stækkun (GPa)

28-34 200-220 10⁻⁶/K ~70

Suðuhæfni¹

Gas: 3 TIG: 2 MIG: 2

Dæmigert fylliefni (EN ISO18273): SG-AlMg5Cr(A) eða AlSi5 og AlMg3 þegar rafskauta þarf vöruna.

Vegna hitainntaksins við suðu er

vélrænni eiginleikar munu minnka um það bil 50% (sbr.

EN1999-1).

Vinnslueiginleikar¹: T4 Temper 3 / T5, T6 Temper 2

Húðunareiginleikar¹ Harð/hlíðar rafskaut: 1 / Skreytingar / björt / litar rafskaut: 2

Tæringarþol¹ Almennt: 1 Marine: 2

¹Hlutfallslegt hæfi, allt frá 1-mjög gott til 6-óhentugt

Síða 2/2


Upprunalegar teikningar og tilvísunarsíður

Product Datasheet



Manufacturer	Mox Profile Systems
Document Title	Design and quality: Line
Product Name	Line
Product Description	Aluminium Flooring Edge Profile
Item No	LNE
Area of Use	Public, Office, Residential
Material	EN AW 6463 T6, EN AW 6061 T6
Length	2500mm
Surface	Anodised

Line aluminum flooring edge profile is an excellent choice for various projects with its versatile, durable and lightweight structure that closes the gap between floorings. Line aluminum flooring edge profile is designed to close the gaps between floor tiles of the same height. It is extremely durable and long-lasting since it is produced from high quality raw material and has thick walls. Unlike its competitors, it stands out with its coating thickness and quality of anodizing. Line perfectly closes the gap between floors with its flat form. Line aluminum flooring edge profile is easily mounted by pressing from the top after applying silicone or joint to the gap between two floors. Corners can be assembled by cutting profile to 45 degree. Line aluminum flooring edge profile has a bright anodized coating option in silver and yellow colors.

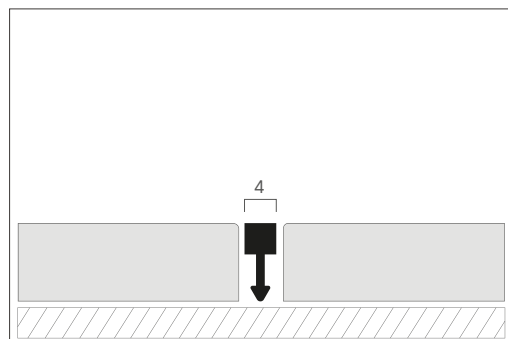

Warranty

This product is under warranty for 5 years from the date of receipt except for the user errors as listed below:

- Damage caused by impact
- Damage caused by scratching
- Damage caused by abrasive substance or chemical cleaning agents contact
- Damage caused by prolonged contact with water
- Damage caused by exposure to intense temperature
- Damage caused by montage



TS-EN 755-8 TS-EN 755-9 TS 4922

ALLOY DATASHEET
EN AW 6463 T6 [AlMg0.7Si]

Place Of Use

The alloy EN AW-6463 is a widely used extrusion alloy, suitable for applications where only modest strength properties are required. Parts can be produced with a good surface quality, suitable for many coating operations. Typical application fields are furniture, finishing materials, windows and doors, car body finishing, facade construction, lighting columns and flagpoles.

Chemical composition according to EN573-3 (weight%, remainder Al)

Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Al
0,20 - 0,60	Max 0,15	0,2	Max 0,5	0,45 - 0,9	-	Max 0,05	Max 0,1	Rest

Mechanical properties according to EN755-2

Temper*	Wall Thickness e***	Yield Stress	Tensile Strength	Elongation	Brinell Hardness
-	e* mm	Rp0,2 min Mpa	Rm min Mpa	Min A50mm % - Max A %	HB**
T4	e≤50	75	125	14 - 12	46
T5	e≤50	150	110	8 - 6	60
T6	e≤50	195	160	10 - 8	74

* Temper designation according to EN515: T4-Naturally aged to a stable condition, T5-cooled from an elevated temperature forming operation and artificially aged, T6-Solution heat treated, quenched and artificially aged,

** Hardness values are for indication only,

*** For different wall thicknesses within one profile, the lowest specified properties shall be considered as valid for the whole profile cross section.

Physical properties (approximate values, 20°C)

Density (kg/m³)	Melting range (°C)	Electrical conductivity (MS/m)	Thermal conductivity (W/m.K)	Co-efficient of thermal expansion 10 ⁻⁶ /K	Modulus of elasticity (GPa)
2700	585-650	28-34	200-220	23.4	~70

Weldability¹

Gas: 3 TIG: 2 MIG: 2

Typical filler materials (EN ISO18273): SG-AlMg5Cr(A) or AlSi5, and AlMg3 when the product has to be anodised. Due to the heat input during welding the mechanical properties will be reduced by approximately 50% (ref. EN1999-1).

Machining characteristics¹: T4 Temper 3 / T5, T6 Temper 2

Coating properties¹ Hard/protective anodising: 1 / Decorative / bright / colour anodising: 2

Corrosion resistance¹ General: 1 Marine: 2

¹Relative qualification ranging from 1-very good to 6-unsuitable