

MOX Systems - tehniskā dokumentācija

product-flex-en.pdf

Tehniskais tulkojums: izmērus skatiet oriģinālajos rasējumos un atsaucēs lapās.

Avota lapa 1

FLEX

Alumīnija grīdas segums

Flex alumīnija formējamais grīdas seguma malu profils tiek izmantots parketā vai keramikā kā rāmis, kas noslēpj grīdas daļu, aizstājot savienojumus.

Papildus savienojuma un uzstādīšanas kļūdu labošanai un estētikas uzlabošanai, tas arī novērš grīdas segumu bojājumus.

Flex alumīnija formējamais grīdas seguma malu profils ir paredzēts, lai atvieglotu grīdas seguma materiālu pāreju.

Tā elastīgais dizains ļauj to saliekt vēlamajā formā.

Papildus funkcionālajām priekšrocībām tā minimālais izskats uzlabo jūsu dizaina kopējo izskatu.

Flex ir matētas anodētas, spilgti anodētas un elektrostatiskās pulverkrāsošanas iespējas.

Lai gan ir pieejami sudraba, dzeltena, inox un melni anodēti krāsu pārklājumi, to var arī krāsot pēc vēlamā RAL koda ar elektrostatisko pulverkrāsošanu.

IZVEIDOJIET IZTEIŅU DIZAINU SAVĀM GRĪDĀM AR TĀ FORMĒJAMO FORMU

Augstums Garums Produkta Nr Virsma mm in mm ft

FLX250010003MEGMS 10 3/8 2500 8 1/5" MEGMS

FLX250010003MESAR 10 3/8 2500 8 1/5" MESAR

FLX250010003MEINX 10 3/8 2500 8 1/5" MEINX

FLX250010003MESYH 10 3/8 2500 8 1/5" MESYH

FLX250010003PEGMS 10 3/8 2500 8 1/5" PEGMS

FLX250010003PESAR 10 3/8 2500 8 1/5" PESAR 2.5mm

FLX250010003PEINX 10 3/8 2500 8 1/5" PEINX 1/8"

FLX250010003PESYH 10 3/8 2500 8 1/5" PESYH

FLX250010003R9016 10 3/8 2500 8 1/5" R9016 h

FLX250010003R7016 10 3/8 2500 8 1/5" R7016

MEGMS MESAR matēts sudrabs, anodized matte yellow, anodized

MEINX MESYH matēts inox, anodēts matēts melns, anodēts

PEGMS PESAR spilgti sudrabs, anodēts spilgti dzeltens, anodēts


PEINX PESYH spilgti inox, anodēts spilgti melns, anodēts

R9016 R7016 balts, daļēji spīdīgs, antracīts, daļēji spīdīgs, pulverkrāsots ar pulvera pārklājumu

Originālie rasējumi un atsaucēs lapas

FLEX

Aluminum Flooring

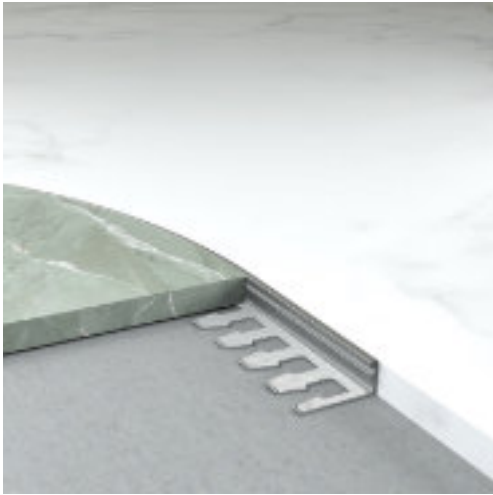


Flex aluminum formable flooring edge profile is used in parquet or ceramic applications as a frame that conceals the floor section, replacing joints. In addition to correcting joint and installation mistakes and improving aesthetics, it also prevents damage to the floor coverings. Flex aluminum formable flooring edge profile is designed to facilitate the transition of flooring materials. Its flexible design allows it to be bent into the desired shape. In addition to its functional advantages, its minimal appearance enhances the overall look of your designs.


Flex has matte anodized, bright anodized and electrostatic powder painting options. While silver, yellow, inox and black anodized color coatings are available, it can also be painted to the desired RAL code with electrostatic powder painting.

CREATE IMAGINATIVE DESIGNS FOR YOUR FLOORING WITH ITS FORMABLE FORM



Product No	Height		Length		Surface
	mm	in	mm	ft	
FLX250010003MEGMS	10	3/8	2500	8 1/5"	MEGMS
FLX250010003MESAR	10	3/8	2500	8 1/5"	MESAR
FLX250010003MEINX	10	3/8	2500	8 1/5"	MEINX
FLX250010003MESYH	10	3/8	2500	8 1/5"	MESYH
FLX250010003PEGMS	10	3/8	2500	8 1/5"	PEGMS
FLX250010003PESAR	10	3/8	2500	8 1/5"	PESAR
FLX250010003PEINX	10	3/8	2500	8 1/5"	PEINX
FLX250010003PESYH	10	3/8	2500	8 1/5"	PESYH
FLX250010003R9016	10	3/8	2500	8 1/5"	R9016
FLX250010003R7016	10	3/8	2500	8 1/5"	R7016

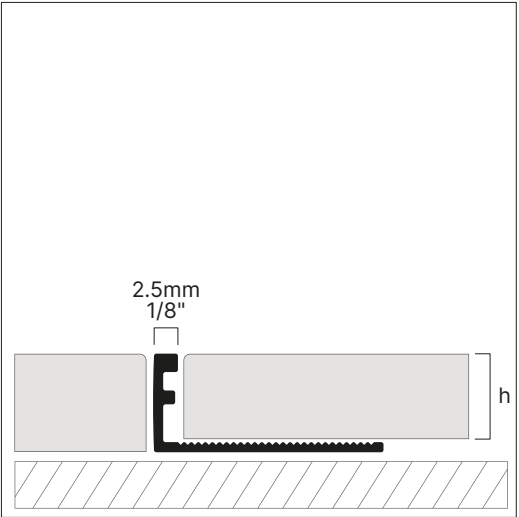



MEGMS
matte silver, anodized



MESAR
matte yellow, anodized



MEINX
matte inox, anodized



MESYH
matte black, anodized



PEGMS
bright silver, anodized




PESAR
bright yellow, anodized



PEINX
bright inox, anodized



PESYH
bright black, anodized



R9016
white, semi gloss,
powder coated



R7016
anthracite, semi gloss,
powder coated