

Sistemi MOX - dokumentazzjoni teknika

datasheet-revio-en.pdf

Traduzzjoni teknika: ikkonsulta t-tpingijiet originali u l-paġni ta' referenza għad-dimensjonijiet.

Paġna tas-sors 1

Skeda tad-Data tal-Prodott

Manifattur Mox Profil Systems

Titlu tad-Dokument Disinn u kwalità: Revio

Isem tal-Prodott Revio

Deskrizzjoni tal-Prodott Profil ta 'Xfer Tapit Aluminju

Ogġett Nru RVO

Qasam ta' Użu Pubbliku, Uffiċċju, Residenzjali

Materjal EN AW 6463 T6, EN AW 6061 T6

Tul 2500mm

Wiċċ Anodizzat

Il-profil tat-tarf tat-tapit tal-aluminju Revio huwa ddisinjat apposta biex iżid l-estetika u l-funzjonalità tal-art tiegħek.

Il-profil tat-tarf tat-tapit tal-aluminju Revio mhux biss jipprovdi transizzjoni bla xkiel bejn l-uċuħ tal-art differenti, iżda jipproteġi wkoll it-truf tat-tapit tiegħek, u jipprevjeni xedd u deformazzjoni li jistgħu jseħħu maż-żmien.

Dawn il-profil jgħinuk tnaqqas l-ispejjeż tat-tiswija u s-sostituzzjoni billi testendi l-ħajja tat-tapit tiegħek.

Huwa estremament durabbli u fit-tul peress li huwa prodott minn materja prima ta 'kwalità għolja u għandu ħitan ħoxnin.

B'differenza mill-kompetituri tiegħu, jispikka bil-ħxuna tal-kisi u l-kwalità tal-anodizzar.

Għandha dehra stylish u moderna bil-forma ovali tagħha u tiffaċilita t-tranzizzjoni bejn l-artijiet.

Il-profil tat-tarf tat-tapit tal-aluminju Revio huwa faċli għall-utent matul il-fażi ta 'installazzjoni, li jippermettilek tikseb riżultat professjonali fi żmien qasir b'struzzjonijiet ċari u għodod sempliċi.

Il-kantunieri jistgħu jiġu mmuntati billi jaqtgħu profil għal 45 grad.

Il-profil tat-tarf tat-tapit tal-aluminju Revio għandu għażla ta 'kisi anodizzat matta fil-kuluri tal-fidda, isfar u inox.

Paġna 1/2

Garanzija

Dan il-prodott huwa taħt garanzija għal 5 snin mid-data tal-wasla ħlief għall-iżbalji tal-utent kif elenkati hawn taħt:

Ħsara kkawżata minn impatt
Ħsara kkawżata minn grif
Ħsara kkawżata minn kuntatt ta' sustanza li joborxu jew aġenti kimiċi tat-tindif
Ħsara kkawżata minn kuntatt fit-tul mal-ilma
Ħsara kkawżata minn espożizzjoni għal temperatura intensa
Ħsara kkawżata minn muntaġġ

LANOITANRETNI FORANODISING QUALITYLABEL INDUSTRIJALI TS-EN 755-8 TS-EN 755-9 TS 4922

Paġna tas-sors 2

SKEDA TA' DATA TAL-LIGA

EN AW 6463 T6 [AlMg0.7Si]

Post tal-Użu

Il-liga EN AW-6463 hija liga ta' estrużjoni użata ħafna, adattata għal applikazzjonijiet fejn huma meħtieġa biss proprjetajiet ta' saħħa modesti.

Partijiet jistgħu jkunu

prodott bi kwalità tajba tal-wieċċ, adattat għal ħafna operazzjonijiet ta' kisi.

Oqsma tipiċi ta' applikazzjoni huma għamara, materjali tal-irfinar, twieqi u bibien, irfinar tal-karozzerija tal-karozzi, kostruzzjoni tal-faċċata, kolonni tad-dawl u arbli tal-bandiera.

Kompożizzjoni kimika skond EN573-3 (piż%, bqija Al)

Si Fe Cu Mn Mg Cr Zn Ti Al

0,20 - 0,60 Max 0,15 0,2 Max 0,5 0,45 - 0,9 - Max 0,05 Max 0,1 Mistrieħ

Proprjetajiet mekkaniċi skond EN755-2

Temper* Ħxuna tal-ħajt e*** Stress ta' Rendiment Qawwa tat-tensjoni Titwil Ebusija Brinell

- e* mm Rp0,2 min Mpa Rm min Mpa Min A50mm % - Max A % HB**

T4 e≤50 75 125 14 - 12 46

T5 e≤50 150 110 8 - 6 60

T6 e≤50 195 160 10 - 8 74

* Deżinjazzjoni tat-temper skont EN515: T4-Naturalment imqadded għal kundizzjoni stabbli, T5-mkessaħ minn operazzjoni ta' formazzjoni ta' temperatura elevata u

imqadded artifiċjalment, T6-Solution ittrattat bis-sħana, imkessaħ u imqadded artifiċjalment,

** Il-valuri tal-ebusija huma għal indikazzjoni biss,

*** Għal ħxuna tal-ħajt differenti fi ħdan profil wieħed, il-proprjetajiet speċifikati l-aktar baxxi għandhom jitqiesu bħala validi għas-sezzjoni trasversali tal-profil kollu.

Proprjetajiet fiżiċi (valuri approssimattivi, 20°C)

Densità Tidwib firxa Elettriku Termali Ko-effiċjent tal-Modulu ta'

(kg/m³) (°C) konduttività konduttività elasticità termali

2700 585-650 (MS/m) (W/m.K) espansjoni (GPa)

28-34 200-220 10⁻⁶/K ~70

Weldability¹

Gass: 3 TIG: 2 MIG: 2

Materjali tipiċi tal-mili (EN ISO18273): SG-AlMg5Cr(A) jew AlSi5, u AlMg3 meta l-prodott irid jiġi anodizzat.

Minħabba l-input tas-sħana waqt l-iwweldjar l

il-proprjetajiet mekkaniċi se jitnaqqsu b'madwar 50% (ref.

EN1999-1).

Karatteristiċi tal-magni¹: T4 Temper 3 / T5, T6 Temper 2

Proprjetajiet tal-kisi¹ Anodizzar iebes/protettiv: 1 / Dekorattiv / qawwi / anodizzazzjoni bil-kulur: 2

Reżistenza għall-korrużjoni¹ Ġenerali: 1 Marittimu: 2

¹Kwalifiki relattiva li tvarja minn 1-tajjeb ħafna sa 6-mhux addattat

Pàġna 2/2


Tpingijiet originali u pagħni ta' referenza

Product Datasheet



Manufacturer	Mox Profile Systems
Document Title	Design and quality: Revio
Product Name	Revio
Product Description	Aluminium Carpet Edge Profile
Item No	RVO
Area of Use	Public, Office, Residential
Material	EN AW 6463 T6, EN AW 6061 T6
Length	2500mm
Surface	Anodised

Revio aluminum carpet edge profile is specially designed to increase the aesthetics and functionality of your floor. Revio aluminum carpet edge profile not only provides a seamless transition between different flooring surfaces, but also protects the edges of your carpet, preventing wear and deformation that may occur over time. These profiles help you reduce repair and replacement costs by extending the life of your carpet. It is extremely durable and long-lasting since it is produced from high quality raw material and has thick walls. Unlike its competitors, it stands out with its coating thickness and quality of anodizing. It has a stylish and modern appearance with its oval form and facilitates the transition between floors. Revio aluminum carpet edge profile is user-friendly during the installation phase, allowing you to achieve a professional result in a short time with clear instructions and simple tools. Corners can be assembled by cutting profile to 45 degree. Revio aluminum carpet edge profile has a matte anodized coating option in silver, yellow and inox colors.

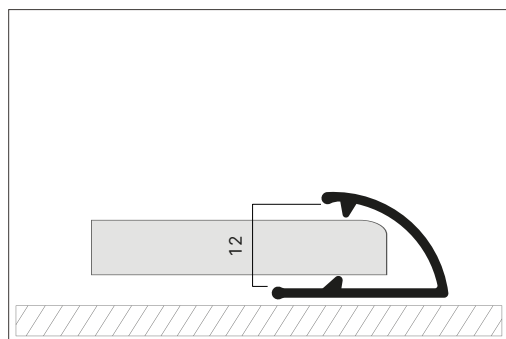

Warranty

This product is under warranty for 5 years from the date of receipt except for the user errors as listed below:

- Damage caused by impact
- Damage caused by scratching
- Damage caused by abrasive substance or chemical cleaning agents contact
- Damage caused by prolonged contact with water
- Damage caused by exposure to intense temperature
- Damage caused by montage



TS-EN 755-8 TS-EN 755-9 TS 4922

ALLOY DATASHEET

EN AW 6463 T6 [AlMg0.7Si]

Place Of Use

The alloy EN AW-6463 is a widely used extrusion alloy, suitable for applications where only modest strength properties are required. Parts can be produced with a good surface quality, suitable for many coating operations. Typical application fields are furniture, finishing materials, windows and doors, car body finishing, facade construction, lighting columns and flagpoles.

Chemical composition according to EN573-3 (weight%, remainder Al)

Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Al
0,20 - 0,60	Max 0,15	0,2	Max 0,5	0,45 - 0,9	-	Max 0,05	Max 0,1	Rest

Mechanical properties according to EN755-2

Temper*	Wall Thickness e***	Yield Stress	Tensile Strength	Elongation	Brinell Hardness
-	e* mm	Rp0,2 min Mpa	Rm min Mpa	Min A50mm % - Max A %	HB**
T4	e≤50	75	125	14 - 12	46
T5	e≤50	150	110	8 - 6	60
T6	e≤50	195	160	10 - 8	74

* Temper designation according to EN515: T4-Naturally aged to a stable condition, T5-cooled from an elevated temperature forming operation and artificially aged, T6-Solution heat treated, quenched and artificially aged,

** Hardness values are for indication only,

*** For different wall thicknesses within one profile, the lowest specified properties shall be considered as valid for the whole profile cross section.

Physical properties (approximate values, 20°C)

Density (kg/m³)	Melting range (°C)	Electrical conductivity (MS/m)	Thermal conductivity (W/m.K)	Co-efficient of thermal expansion 10 ⁻⁶ /K	Modulus of elasticity (GPa)
2700	585-650	28-34	200-220	23.4	~70

Weldability¹

Gas: 3 TIG: 2 MIG: 2

Typical filler materials (EN ISO18273): SG-AlMg5Cr(A) or AlSi5, and AlMg3 when the product has to be anodised. Due to the heat input during welding the mechanical properties will be reduced by approximately 50% (ref. EN1999-1).

Machining characteristics¹: T4 Temper 3 / T5, T6 Temper 2

Coating properties¹ Hard/protective anodising: 1 / Decorative / bright / colour anodising: 2

Corrosion resistance¹ General: 1 Marine: 2

¹Relative qualification ranging from 1-very good to 6-unsuitable