


Product Datasheet



Manufacturer	Mox Profile Systems
Document Title	Design and quality: Sentio
Product Name	Sentio
Product Description	Aluminium Skirting Board
Item No	SNT
Area of Use	Public, Office, Residential
Material	EN AW 6463 T6, EN AW 6061 T6
Length	2500mm
Surface	Powder Coated, Anodised, Chrome Plated

Sentio aluminum skirting board is mostly preferred in areas with large gaps between wall and floorings due to its wide form. With the extended hollow area in its design, it collects the telephone, electricity and internet cables to organize environments such as workplaces and offices. It covers the defects in floor and wall joints. It prevents dirt accumulation and harmful organisms to provide hygienic and healthy use for many years. It is extremely durable and long-lasting since it is produced from high quality raw material and has thick walls. Unlike its competitors, it stands out with its coating thickness and quality of anodizing, and with its pretreatment application that provides resistance to corrosion in electrostatic powder painting. Sentio provides unity with its oval transition appearance and is compatible with both classical and modern architecture. Sentio aluminum skirting board can be easily installed by fixing the universal rear piece to the wall with screws and mounting the front cover profile with its snap lock system. Corners can be assembled by cutting the profile to 45 degrees. Sentio aluminum skirting board has matte anodized, bright anodized, satin chemical bright anodized and electrostatic powder painting options. While silver, yellow, inox, bronze and black anodized color coatings are available, it can also be painted to the desired RAL code with electrostatic powder painting.

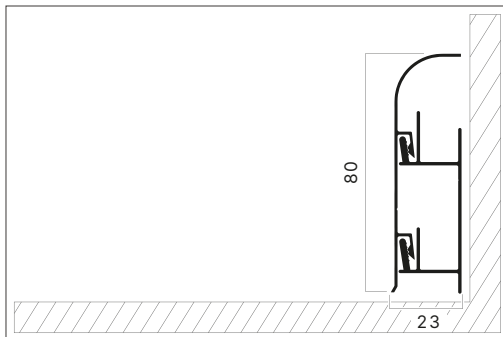

Warranty

This product is under warranty for 5 years from the date of receipt except for the user errors as listed below:

- Damage caused by impact
- Damage caused by scratching
- Damage caused by abrasive substance or chemical cleaning agents contact
- Damage caused by prolonged contact with water
- Damage caused by exposure to intense temperature
- Damage caused by montage



ALLOY DATASHEET
EN AW 6463 T6 [AlMg0.7Si]

Place Of Use

The alloy EN AW-6463 is a widely used extrusion alloy, suitable for applications where only modest strength properties are required. Parts can be produced with a good surface quality, suitable for many coating operations. Typical application fields are furniture, finishing materials, windows and doors, car body finishing, facade construction, lighting columns and flagpoles.

Chemical composition according to EN573-3 (weight%, remainder Al)

Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Al
0,20 - 0,60	Max 0,15	0,2	Max 0,5	0,45 - 0,9	-	Max 0,05	Max 0,1	Rest

Mechanical properties according to EN755-2

Temper*	Wall Thickness e***	Yield Stress	Tensile Strength	Elongation	Brinell Hardness
-	e* mm	Rp0,2 min Mpa	Rm min Mpa	Min A50mm % - Max A %	HB**
T4	e≤50	75	125	14 - 12	46
T5	e≤50	150	110	8 - 6	60
T6	e≤50	195	160	10 - 8	74

* Temper designation according to EN515: T4-Naturally aged to a stable condition, T5-cooled from an elevated temperature forming operation and artificially aged, T6-Solution heat treated, quenched and artificially aged,

** Hardness values are for indication only,

*** For different wall thicknesses within one profile, the lowest specified properties shall be considered as valid for the whole profile cross section.

Physical properties (approximate values, 20°C)

Density (kg/m ³)	Melting range (°C)	Electrical conductivity (MS/m)	Thermal conductivity (W/m.K)	Co-efficient of thermal expansion (10 ⁻⁶ /K)	Modulus of elasticity (GPa)
2700	585-650	28-34	200-220	23.4	~70

Weldability¹

Gas: 3 TIG: 2 MIG: 2

Typical filler materials (EN ISO18273): SG-AlMg5Cr(A) or AISi5, and AlMg3 when the product has to be anodised. Due to the heat input during welding the mechanical properties will be reduced by approximately 50% (ref. EN1999-1).

Machining characteristics¹: T4 Temper 3 / T5, T6 Temper 2

Coating properties¹ Hard/protective anodising: 1 / Decorative / bright / colour anodising: 2

Corrosion resistance¹ General: 1 Marine: 2

¹Relative qualification ranging from 1-very good to 6-unsuitable